


REV	ECN NO.	DISCRIPTION	CHEKED/DATE	APPD/DATE

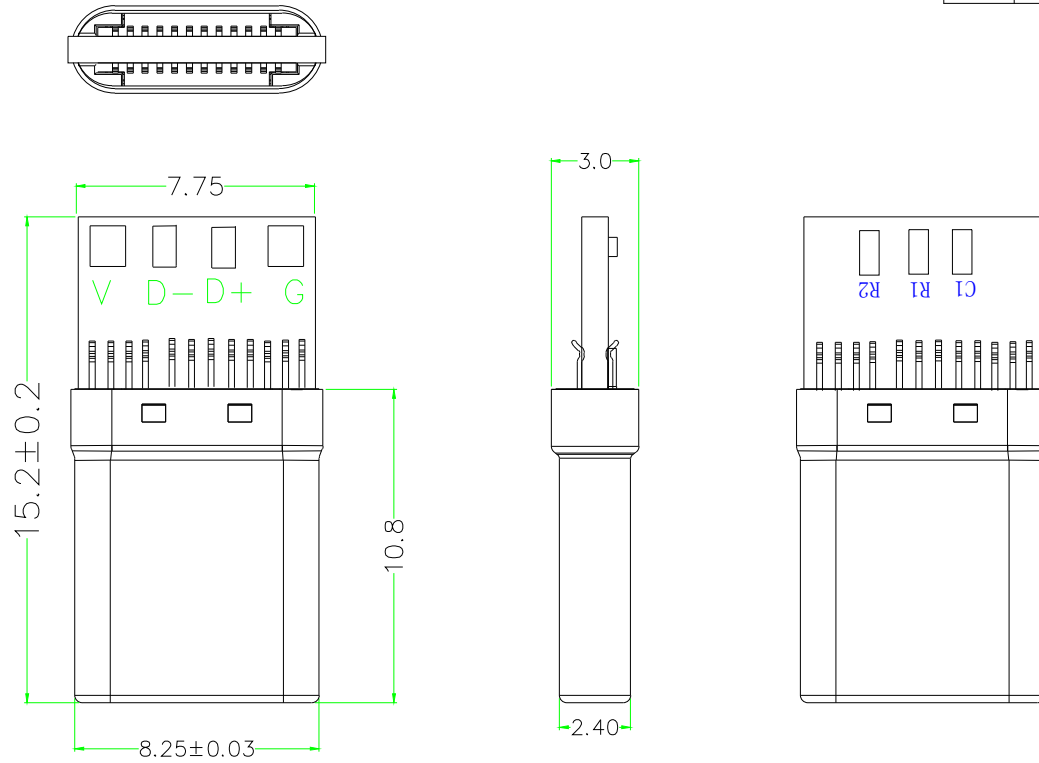

Notes:

- Materials
 - Housing: LCP+30%GF, UL94 V-0;
 - Contact: High conductivity copper alloy, Gold Plating at mating area & solder tail, all over Nickel;
 - Shell: Stainless steel, all over Nickel;
 - Latch: Stainless steel, all over Nickel;
 - Mid-Plate:Stainless steel, all over Nickel;
- Ratings
 - Voltage Rating: 15V AC;
 - Current Rating: 3A ;
 - Operating Temperature: -40° C ~ 85° C;
- Electrical Requirement:
 - Contact Resistance: 30mΩ Max,
 - Dielectric Withstanding Voltage: 100V AC (RMS) for 1 minute;
 - Insulation Resistance: 500MΩ Min.
- Mechanical Performance:
 - Insertion force: 5~20N. (from 1~10,000 Cycles);
 - Withdrawal force: 8~20N. (from 1~1,000 Cycles);
6~20N. (from 1,001~10,000 Cycles);
 - Durability life: 5,000 Cycles;

电阻56K ————— R1

电容 103 ————— C1

深圳市安锐微电子科技有限公司

未标注公差为±0.1

公差 (TOLERANCES)	模号 (Mold No.)	比例 (Scale)	品名 (Produce Name)			
X	±0.15	1:1 (A4)	TYPE-C四芯拉伸倒角			
X.X	±0.10		料号 (Part No.)	ARTC-24LN02B-A054	单位 (Unit)	MM
X.XX	±0.05	设计 (DESIGN)	图名 (Draw Name)	成品图	页次 (Sheet)	1/1
X.XXX	±0.02	审核 (CHECK)	文件编号 (Draw No.)	WP-YMK058-P01	版次 (REV)	A0
Angle	±1.0°	核准 (APP'D)				