
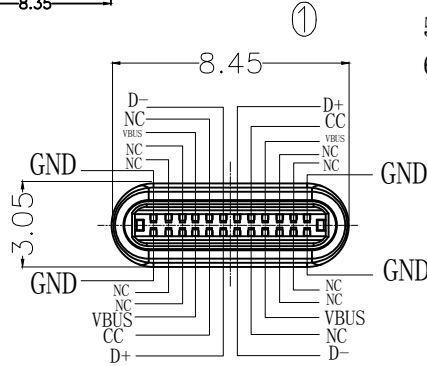
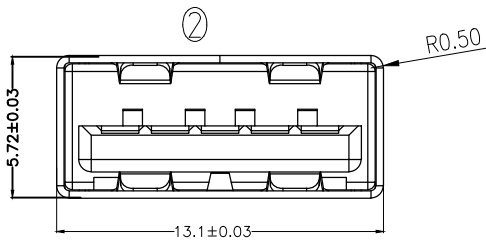
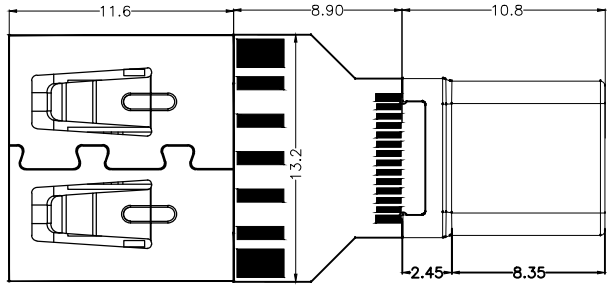
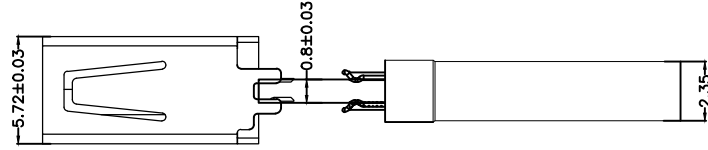


ROHS

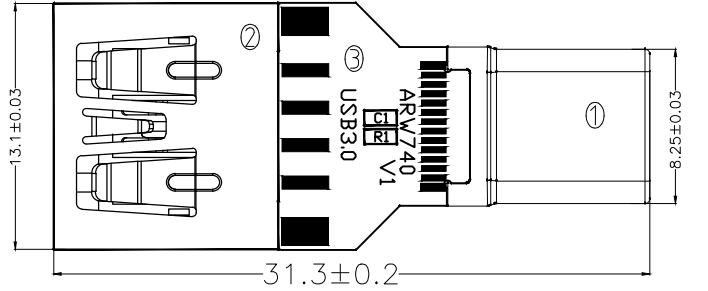

未标注尺寸公差为: ±0.1

- 注解:
- 1、材质: ROHS
    - ①Type-c公头
      - a、外壳: 拉伸 不锈钢 SUS3161 T=0.15mm 镀镍>100"
      - b、端子: 黄铜 C2680, H65-EH;
      - c、塑胶: LCP UL94-V0(黑)
      - d、卡勾: 不锈钢 SUS301 T=0.35mm 镀镍>80"
    - ②USB-A 3.0母
      - a、外壳: SPCC 镀镍>100";
      - b、压接端子: 黄铜 镀金;
      - b、塑胶: LCP200° -280° (蓝)
    - ③PCB板
      - a、无铅喷锡 苹果绿 0.8+/-0.03mm
  - 2、电气性能:
    - a、额定电压: 5V DC;
    - b、工作环境: -25℃~80℃ ;
  - 3、盐雾测试: 5%盐水, 35℃, 24H表面无氧化 (外壳、端子、PCB板)
  - 4、插拔测试: 插入3~20N; 拔出3~20N; 25次/分钟; 6000次, 功能正常
  - 5、C1--104电容 R1--5.1K电阻
  - 6、功能: USB 3.0数据传输+OTG取电。

Autodesk

Autodesk

A/0		图面新发行	2021-5-22	QUALITY SYMBOLS	UNIT	SCALE	TOLERANCES	ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS	
REV	DESCRIPTION/ECN.NO	DATE	ZERO DEFECT	MAJOR S.P.C	mm	1:1	X±0.30 XX±0.20 XXX±0.10	X.±5 X.±3 .XX±2	规格		PART NO.	SHT	1/1
									OTG 拉伸 31.3mm		名称	ARW740 USB-A 3.0母转TYPE-C公头	
											编码	ARW-740-001	REV   A/0